




輔助接點組


安裝方式	2P 頂裝式			4P 頂裝式				側裝式	
外觀									
型號	CA2-D20	CA2-D11	CA2-D02	CA2-D40	CA2-D31	CA2-D22	CA2-D13	CA2-D04	SMC-D11
接點	2a	1a+1b	2b	4a	3a+1b	2a+2b	1a+3b	4b	1a+1b
適用之電磁接觸器	SMC09 ~SMC85								

輔助接點組 | SMC系列

11	安裝方式	連續通電電流 (A)	輔助接點構成	外型尺寸 (mm)		
				L	W	H
CA2-D20	2P 頂裝式	10	2a	48	23	38.5
CA2-D11			1a+1b			
CA2-D02			2b			
CA2-D40	4P 頂裝式	10	4a	48	44.5	38.5
CA2-D31			3a+1b			
CA2-D22			2a+2b			
CA2-D13			1a+3b			
CA2-D04			4b			
SMC-D11	側裝式	10	1a+1b	62.8	12	51.9



電磁開關 MAGNETIC SWITCH

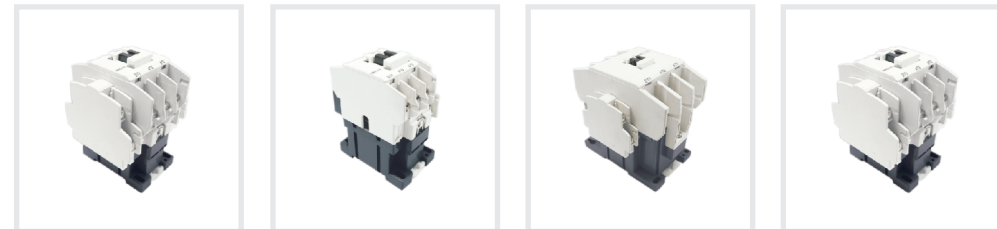

Series guide

凱韋電機廠股份有限公司

雲林縣斗六市雲科路三段86號
No.86, Sec. 3, Yunke Rd., Douliu City,
Yunlin County 64064, Taiwan
TEL:05-5519000
FAX:05-5517890
Email:Sales@kaiwei.com.tw
Website:www.kaiwei.com.tw
統一編號:64993032

2021.08

SAFETY & SUSTAINABILITY

2021 © Copyright KAIWEI ELECTRIC. All right reserved.



KAIWEI ELECTRIC CO.,LTD.





機種	電磁接觸器		非可逆		SMC-09			SMC-12			SMC-18			SMC-22			SMC-32			SMC-40			SMC-50			SMC-65			SMC-75			SMC-85			S-C125			S-C150			S-C220					
	電磁開關		開放型	非可逆	MSO-SMC-09			MSO-SMC-12			MSO-SMC-18			MSO-SMC-22			MSO-SMC-32			MSO-SMC-40			MSO-SMC-50			MSO-SMC-65			MSO-SMC-75			MSO-SMC-85			—			—			—					
額定容量	額定絕緣電壓 Ui				1000V			1000V			1000V			1000V			1000V			1000V			1000V			660V			660V			660V														
	連續通電電流 Ith(Ac1)				20A			25A			32A			40A			50A			60A			80A			100A			110A			135A			165A			200A			250A					
					A	kW	Hp	A	kW	Hp	A	kW	Hp	A	kW	Hp	A	kW	Hp	A	kW	Hp	A	kW	Hp	A	kW	Hp	A	kW	Hp	A	kW	Hp	A	kW	Hp	A	kW	Hp						
額定容量	AC 3級額定容量 (kW/HP/A)				單相		110~120V	9	0.37	0.5	12	0.55	0.75	15	0.75	1	22	1.5	2	32	2.2	3	42	3	4	—																				
	AC 3級額定容量 (kW/HP/A)		三相		200~230V	9	1.5	2	12	1.5	2	15	2.2	3	22	3.7	5	32	4	5.5	42	5.5	7.5	—																						
				220V	9	2.2	3	12	3	4	15	3.7	5	22	5.5	7.5	32	7.5	10	42	11	15	55	15	20	65	19	25	80	22	30	105	25	35	135	37	50	165	45	60	220	65	85			
				380V	9	3.7	5	12	5.5	7.5	15	7.5	10	22	11	15	32	15	20	42	19	25	55	30	40	65	33	45	80	37	50	105	45	60	130	75	100	160	90	125	190	110	150			
				440V	8	3.7	5	11	5.5	7.5	14	7.5	10	21	11	15	30	15	20	36	19	25	52	30	40	57	33	45	64	37	50	80	55	75	130	75	100	160	90	125	190	110	150			
				575V	6.5	3.7	5	9	5.5	7.5	13	7.5	10	16	11	15	25	15	20	29	19	25	46	30	40	50	33	45	53	37	50	75	55	75	105	75	100	130	90	125	150	110	150			
				NEMA				O			O			O			O			O			O			O			O			O			O			O			O			O		
				輔助接點				1a1b			1a1b			1a1b			1a1b			1a1b			1a1b			2a2b			2a2b			2a2b			2a2b			2a2b			2a2b			2a2b		
				標準電流值(電流範圍) (A)				NTH-0.5~11			NTH-14			NTH-15/17			NTH-21			NTH-25/28/32			NTH-38/44			NTH-50/65			NTH-80			NTH-96			NTH-126			TH-120			—			—		
				0.5(0.35~0.5) 0.75(0.5~0.75) 1.05(0.75~1.05) 1.45(1.05~1.45) 1.9(1.4~1.9) 2.5(1.8~2.5) 3(2.4~3) 4(2.9~4) 5(3.8~5) 6.5(4.5~6.5) 8(6~8) 11(8~11)				14(11~14)			15(10~15) 17(14~17)			21(17~21)			25(21~25) 28(24~28) 32(26~32)			38(30~38) 44(36~44)			50(33~50) 65(43~65)			80(54~80)			96(64~96)			126(85~126)			120(100~160)			—			—					

電磁接觸器 | SMC/SC系列 | 非可逆式

型名	CNS.JIS.JEMAC3 額定容量kW(Hp),A			連續通電電流 (A)	輔助接點	外型尺寸 (mm)		
	220V	380V	440V			L	W	H
SMC-09	2.2(3),9	3.7(5),8.5	3.7(5),8	20A	1a1b	80	44	87.2
SMC-09S								
SMC-12	3(4),12	5.5(7.5),11.5	5.5(7.5),11	25A	1a1b	80	44	87.2
SMC-12S								
SMC-18	3.7(5),15	7.5(10),15	7.5(10),14	32A	1a1b	80	44	87.2
SMC-18S								
SMC-22	5.5(7.5),22	11(15),22	11(15),21	40A	1a1b	80	44	87.2
SMC-22S								
SMC-32	7.5(10),32	15(20),31	15(20),30	50A	1a1b	83.3	68.6	94.6
SMC-32S								
SMC-40	11(15),42	19(25),38	19(25),36	60A	1a1b	83.3	68.6	94.6
SMC-40S								
SMC-50	15(20),55	30(40),55	30(40),52	80A	2a2b	99	94.2	118
SMC-50S								
SMC-65	19(25),65	33(45),65	33(45),57	100A	2a2b	99	94.2	118
SMC-65S								
SMC-75	22(30),80	37(50),80	37(50),64	110A	2a2b	99	94.2	118
SMC-75S								
SMC-85	25(35),105	45(60),105	55(75),80	135A	2a2b	99	94.2	118
SMC-85S								
S-C125	37(50),135	75(100),135	75(100),130	165A	2a2b	141	141	143
S-C150	45(60),165	90(125),165	90(125),160	200A	2a2b	154	161	163
S-C220	65(85),220	110(150),210	110(150),190	250A	2a2b	160	179	192

電磁開關 | SMC系列 | 開放型.非可逆式

型名	CNS.JIS.JEMAC3 額定容量kW(Hp),A			連續通電電流 (A)	輔助接點	外型尺寸 (mm)		
	220V	380V	440V			L	W	H
MSO-SMC-09	2.2(3),9	3.7(5),8.5	3.7(5),8	20A	1a1b	141	44	93
MSO-SMC-09S								
MSO-SMC-12	3(4),12	5.5(7.5),11.5	5.5(7.5),11	25A	1a1b	141	44	93
MSO-SMC-12S								
MSO-SMC-18	3.7(5),15	7.5(10),15	7.5(10),14	32A	1a1b	141	44	93
MSO-SMC-18S								
MSO-SMC-22	5.5(7.5),22	11(15),22	11(15),21	40A	1a1b	141	44	93
MSO-SMC-22S								
MSO-SMC-32	7.5(10),32	15(20),31	15(20),30	50A	1a1b	144	68.6	93
MSO-SMC-32S								
MSO-SMC-40	11(15),42	19(25),38	19(25),36	60A	1a1b	144	68.6	93
MSO-SMC-40S								

註: 1.S為附加保護蓋型。